


Tree Selection, Planting, and Establishment Specifications

1. All plant material will be 1 3/4" to 3" caliper in size and conform to the American Standard for Nursery Stock.
2. All trees will be installed according to the following planting detail:

Tree planting hole diameter shall be 4 times the diameter of the root ball and 2" more shallow

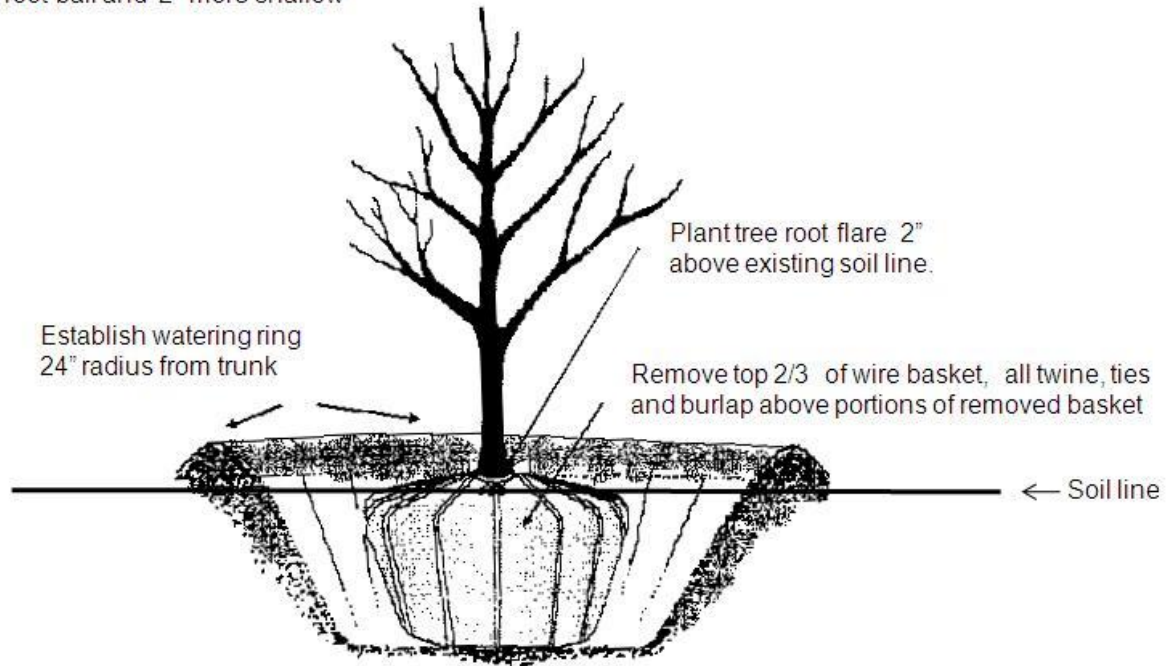

3. Trees damaged as a result of poor installation practices or mishandling during shipment will not be accepted.
4. All backfill will consist entirely of native soil. No soil amendments will be added.
5. Trees will not be staked unless in excess of 10 feet in height. All trees installed under these specifications will be warranted for 1 year.
6. As part of the 1 year warranty tree maintenance will include regular watering, mulching, removal of damaged branches, and insect control according to the following schedule:
 - a. Mulching with composted wood chips over the entire planting area to a depth of 2" with no mulch placed within 6" of trunk. Mulch inspection will take place quarterly for proper coverage and mulch shall be renewed in spring and fall.
 - b. Inspection and removal of damaged branches will take place quarterly.
 - c. Inspection and treatment for insect infestations will take place quarterly.